
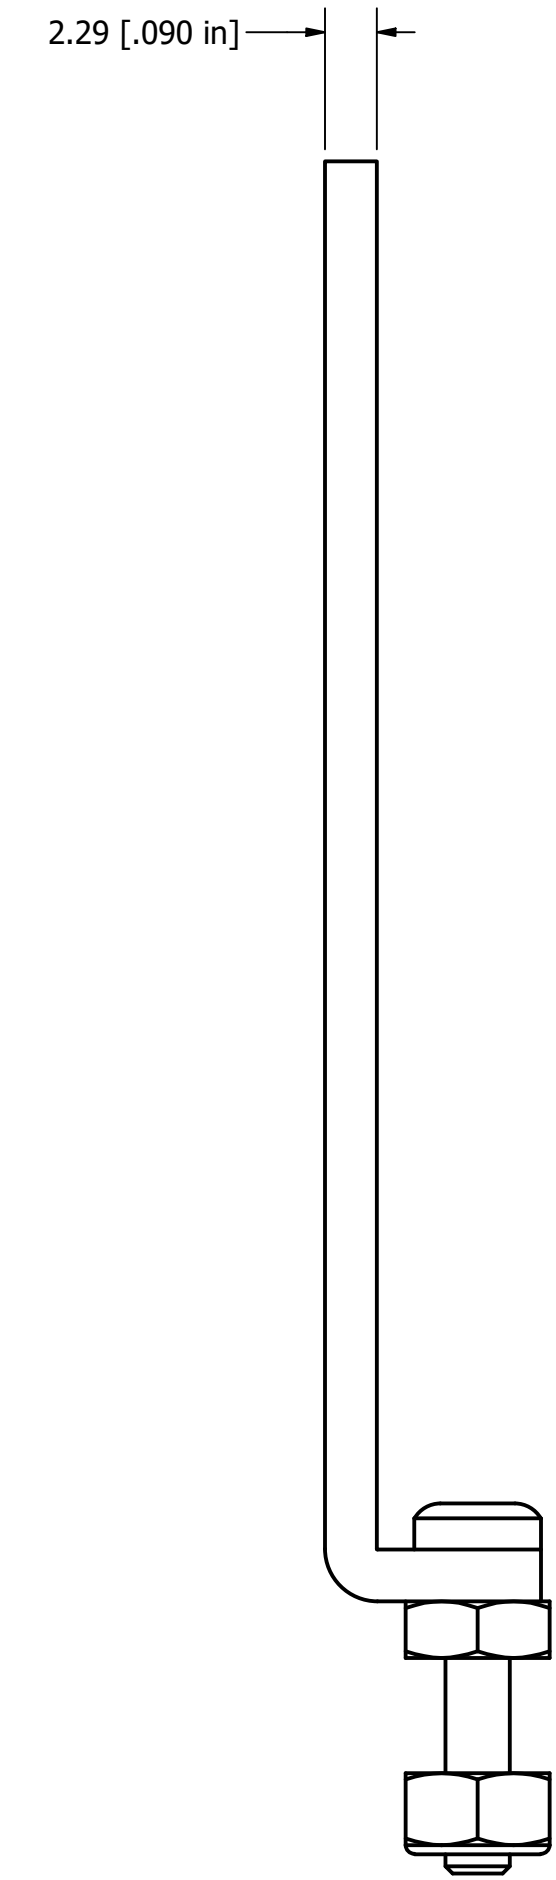
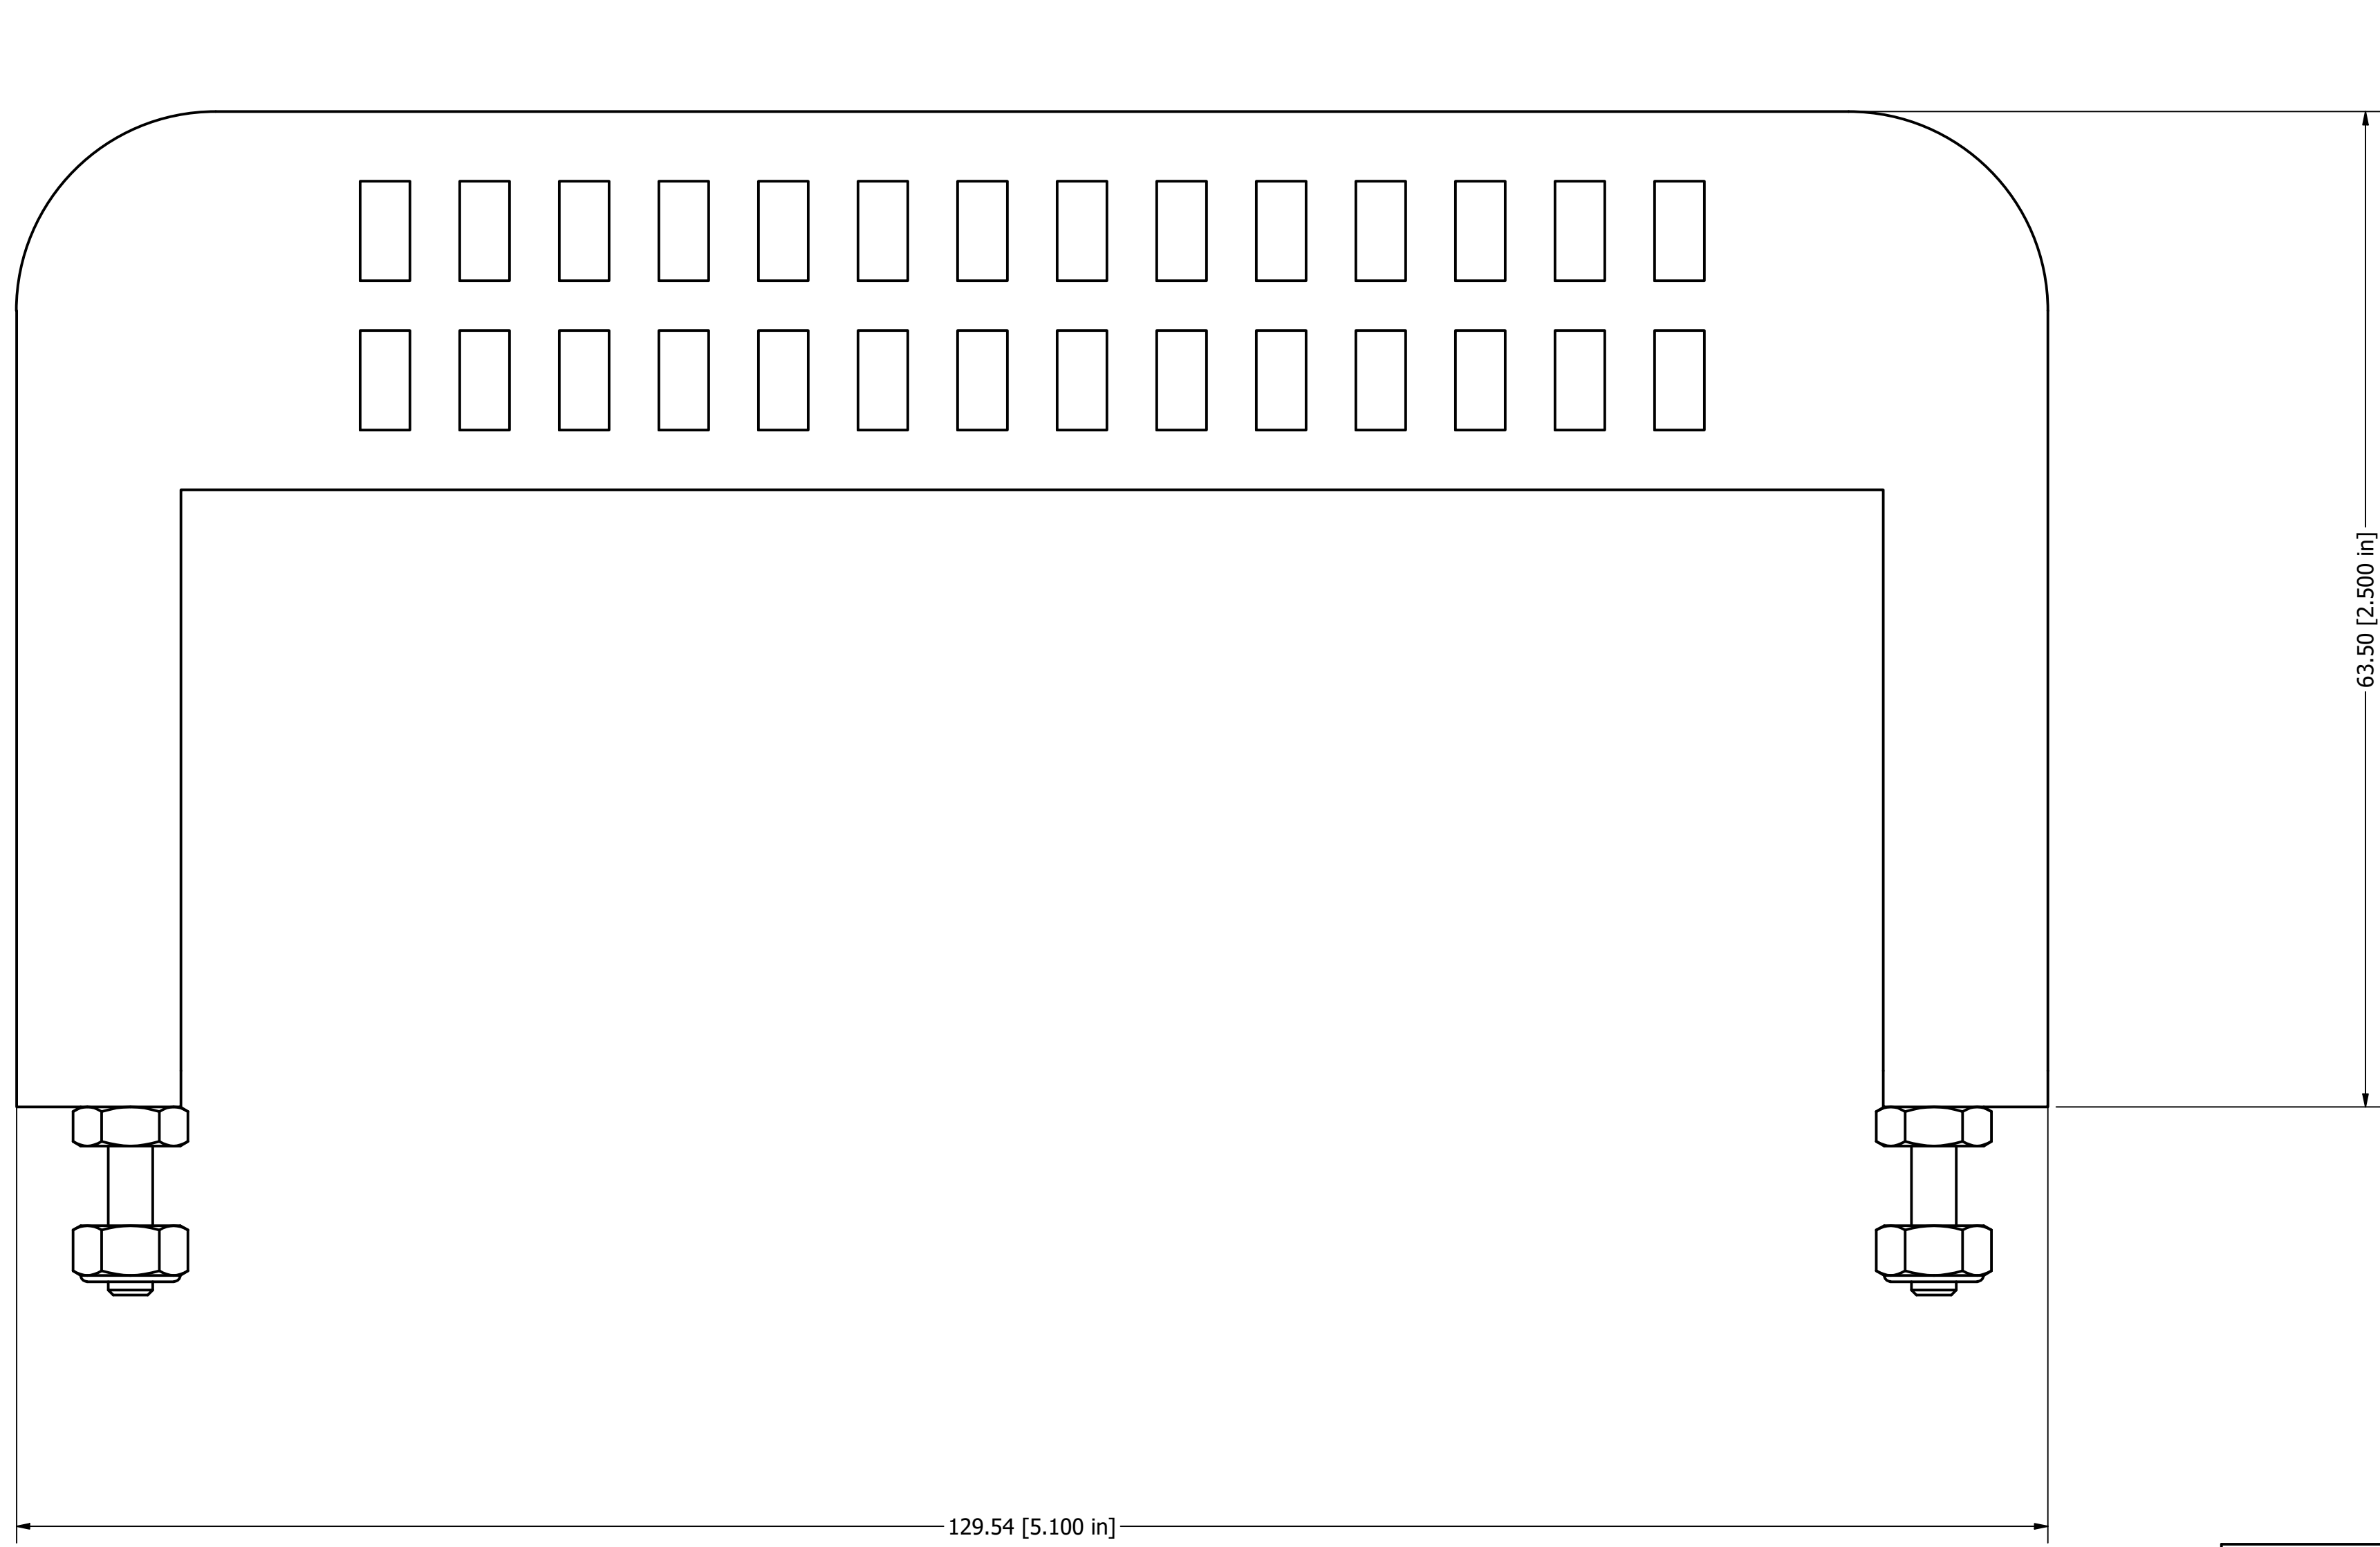


NOTES:

1. SAND IN DIRECTION SHOWN, ON BOTH SIDES, USING 150 GRIT SANDPAPER.
2. BEND RADI II AT SHOP MINIMUM, RELIEF AT SHOP OPTION.
3. CHEM FILM MIL-C5541 CLASS 3 CLEAR
4. K-FACTOR USED TO CREATE FLAT PATTERN.
5. DO NOT USE THE FLAT PATTERN TO INSPECT PART.

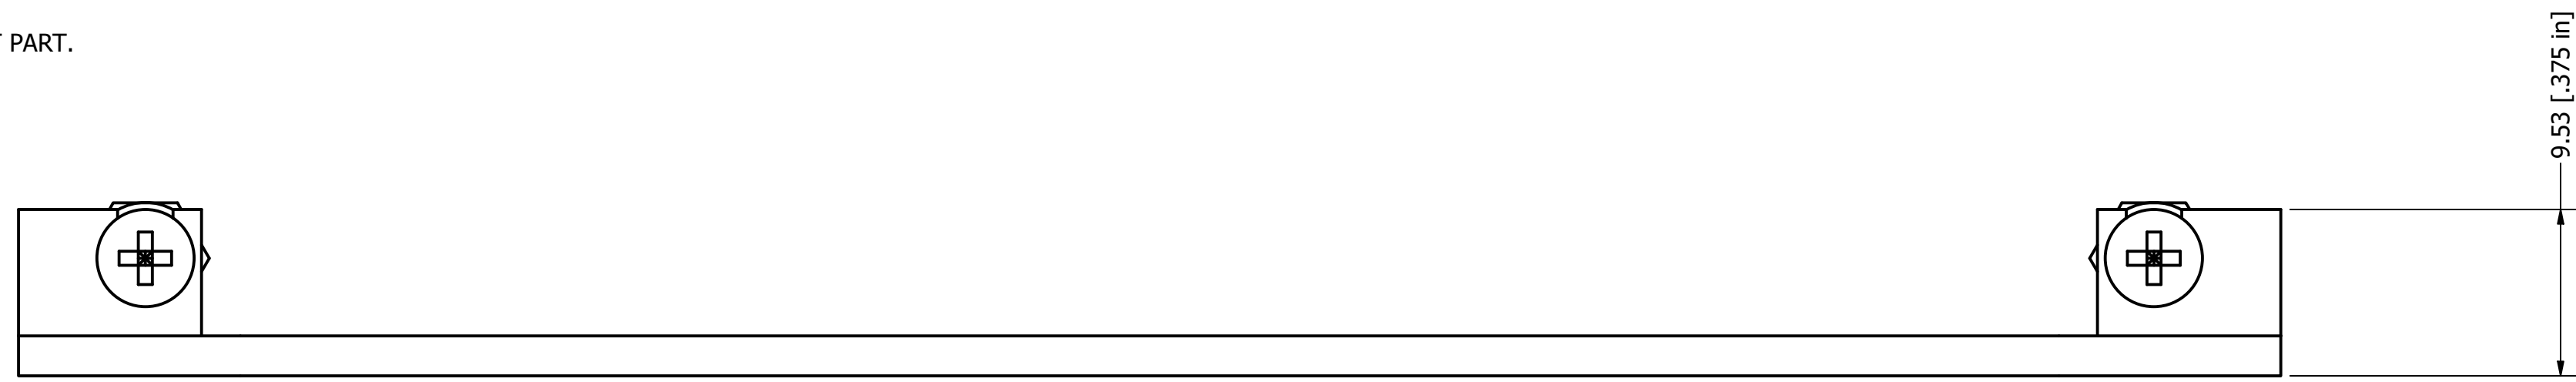


BALLOON LEGEND	
PART NUMBER	QTY

MAC PANEL PROPRIETARY  
This document may contain confidential and proprietary information that is the property of MAC Panel Company that may not be disclosed to, or duplicated for others except as authorized by MAC Panel Company.

TOLERANCES (UNLESS OTHERWISE SPECIFIED)  
SHEET METAL MACHINED  
ANGLES ± 1° ANGLES ± 1°  
.XX ± .03 .XX ± .01  
.XXX ± .010 .XXX ± .005  
.XXXX ± .0005 .XXXX ± .0005

REMOVE ALL BURRS AND BREAK SHARP EDGES.



DRAWN BY DBC	05/06/2019	MAC PANEL COMPANY - HIGH POINT, NC	
ENGINEERING		TITLE	
OPERATIONS		APEX. STRAIN RELIEF, 50 POS. POWER, 360	
MANUFACTURING		SIZE D	CAGE CODE 16654
ASSEMBLY		DWG NO 562208-CU	REV A
MATERIAL USED 5052-H32 ALUMINUM		SCALE	SPN:
		SHEET 1 OF 1	